

EcoPour Valve




ECO-friendly & ECOnomical

- > Green valve, with recyclable parts
- > A mechanical actuation that requires no electricity and even works under brown or black-out conditions!
- > Clever and ultra-reliable design eliminates the two leading causes (solenoid and switch activation) of service calls/failure
- > Lowest life cost valve delivers reliable performance at a sensible price and continued savings from a lack of energy consumption
- > **Dispensing Solutions that *Pour More***

LANCER

lancercorp.com

What's different about EcoPour

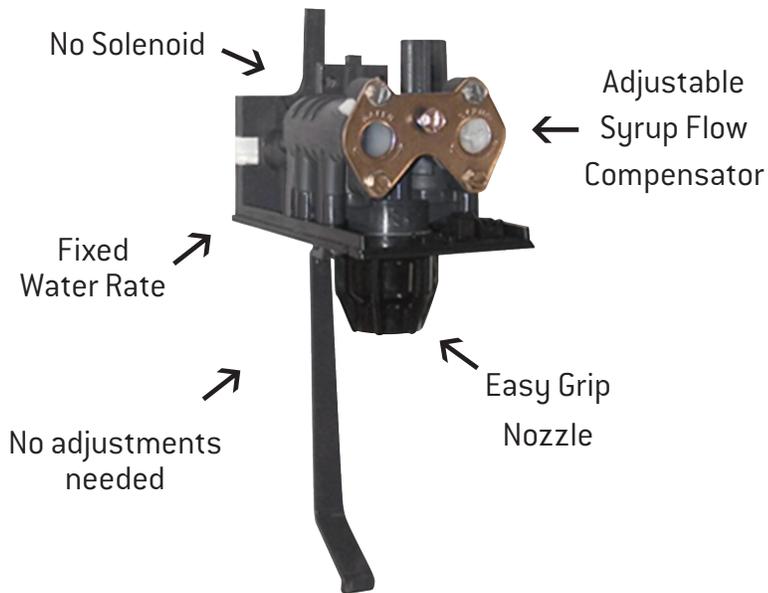

EcoPour Valve

SPECIFICATIONS

PRESSURE REQUIREMENTS

(FLOWING PRESSURE)

Water: 40 - 100 psig (2.8 - 6.89 bar)

Syrup (Sugar): 40 - 80 psig (2.8 - 5.5 bar)

Syrup (Diet/Light): 40 - 80 psig (2.8 - 5.5 bar)

ELECTRICAL REQUIREMENTS

N/A

DRINK FLOW RATES

1.5 oz/s (44.4 ml/s)

FLOW WASHER

Only has an adjustable syrup flow wash, water flow non-adjustable.

OPERATING TEMPERATURE


32° F (0° C) – 105° F (40.6° C)

STANDARD LANCER MOUNTING BLOCK

– EcoPour mounting block has the same mounting screw hole pattern as the following:

- > Dole SEV
- > Dole FFV
- > Cornelius UF1, SF1
- > McCann Turbo Flo Jr.

Parts & Accessories

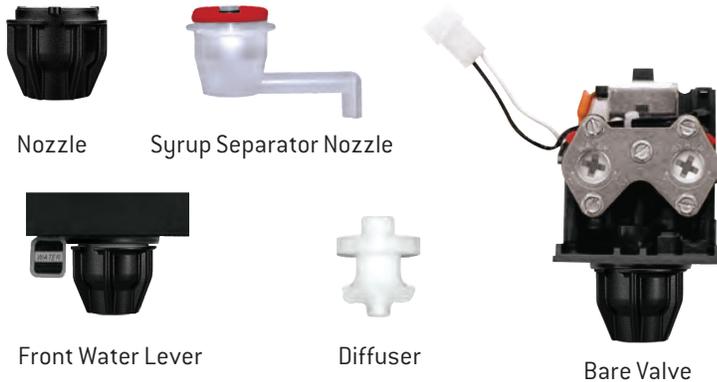

Customer Service:

Should you require more information about our products, please do not hesitate to contact our customer service desk at custserv@lancercorp.com.

Warranty:

For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.

Lancer Corp. 6655 Lancer Boulevard · San Antonio, TX 78219

210-310-7000 · 1-800-729-1500 · Fax: 210-310-7250

Pour More

LANCER

lancercorp.com

