

8-Valve



6-Valve



Have fun and get variety with the unique, sleek design of the **Stubborn**, available with 6 or 8 valves.

Features

- 6 or 8 VersaPour 3.0 valves with unique craft handle dispensing
- Built-in cold carbonation meets Intellicarb standard
- Portion control capability with up to 4 programmable sizes
- 3-way back block allows for complete carb / non carb flexibility without depressurizing the system
- High capacity ice storage bin
- Ice bin insulated with HFC free structural foam
- High capacity drip tray
- Stainless steel construction; interior and exterior
- Includes pump and motor assembly



PEPSICO
Exclusive

Certified by these agencies:



CUSTOMER SERVICE

Should you require more information about our products, please do not hesitate to contact our customer service team at custserv@lancerworldwide.com.

WARRANTY


For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.

For more Information visit lancerworldwide.com or call 1-800-729-1500


6655 Lancer Boulevard • San Antonio, TX 78219 • 210-310-7000 • Fax: 210-310-7250 • ©2021 Lancer Worldwide™ • Stubborn 01/21

Pepsi is a registered trademark of PepsiCo © 2021

8-Valve

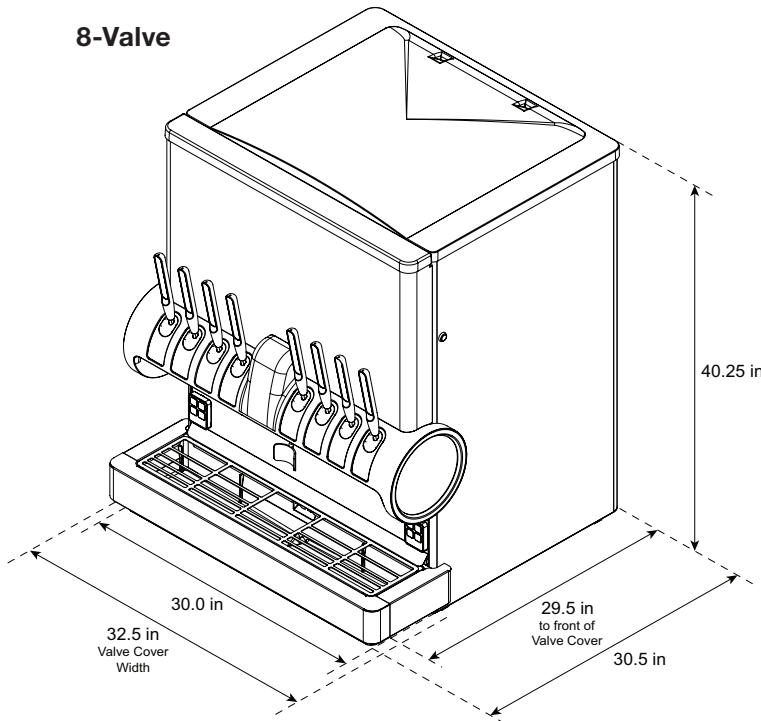

6-Valve

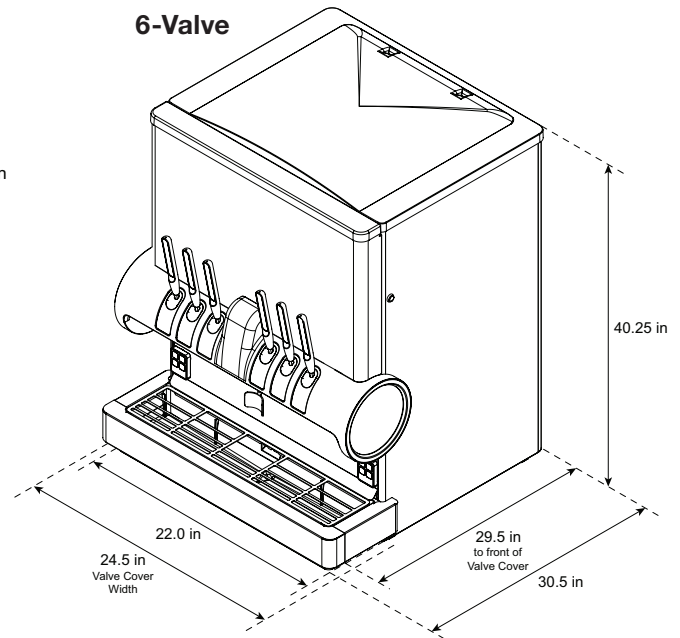

Dimensions

6-valve: 40.25" H x 24.5" W x 30.5" D (1022 mm H x 622 mm W x 800 mm D)
 8-valve: 40.25" H x 32.5" W x 30.5" D (1022 mm H x 825.5 mm W x 775 mm D)
 Base Width: 6-valve: 22" (559 mm) | 8-valve: 30" (762 mm)

Space Required

6-valve: 24" W x 31.5" D (610 mm W x 800 mm D)
 8-valve: 32" W x 31.5" D (813 mm W x 800 mm D)
 Height: Allow sufficient clearance for manually filling with ice or refer to ice maker recommendation for top clearance.

Electrical

6-valve: 230V / 50-60Hz / 1.5 Amps
 8-valve: 115V / 60Hz / 3.6 Amps

Weight

6-valve: With ice: 480 lbs (218 kg) - Shipping: 310 lbs (141 kg)
 8-valve: With ice: 610 lbs (281 kg) - Shipping: 365 lbs (161 kg)

Ice

6-valve: Capacity: 200 lbs (91 kg)
 8-valve: Capacity: 290 lbs (132 kg)

Fittings (Same for 6V & 8V)

Soda Inlets: 3/8" (9.5mm) male barb
 Syrup Inlets: 3/8" (9.5mm) male barb

Plain Water Supply (Same for 6V & 8V)

Minimum Flowing Pressure: 75 psi

Carb Water Supply (Same for 6V & 8V)

Minimum Flowing Pressure: 25 psi
 Maximum Static Pressure: 50 psi

Carbon Dioxide (CO2) Supply (Same for 6V & 8V)

Minimum Pressure: 70 psig
 Maximum Pressure: 80 psig