

# INSTALLATION INSTRUCTIONS

## AMBIENT PRODUCT KIT (PN 82-2395)

### WARNING

DISCONNECT POWER SOURCE FROM DISPENSER BEFORE PROCEEDING.

### CAUTION

SHUT OFF PLAIN WATER AND/OR SODA WATER SUPPLY BEFORE PROCEEDING.

#### 1. INSTALLATION INSTRUCTIONS (SEE FIGURE 1)

- 1.1 Remove Splash Plate and disconnect syrup supply line from syrup inlet of valve to be retrofitted.
- 1.2 Remove valve and back block from faucet plate.

### CAUTION

DO NOT DAMAGE O-RING ON DOLE FITTING.

- 1.3 Remove syrup supply tube from faucet plate. Purge product line of any syrup and flush completely.
- 1.4 Cap syrup inlet with black inlet cap. Cap syrup outlet of deactivated tube with red outlet cap.

### CAUTION

DO NOT DAMAGE O-RING ON DOLE FITTING.

- 1.5 Pull deactivated syrup tube back and insert new Ambient Product tube into faucet plate. Make sure Ambient Product tube is fully seated into keyslot of faucet plate and that it extends out the same distance as the water supply tube.

### CAUTION

DO NOT OVERTIGHTEN THE SCREWS ATTACHING THE BACK BLOCK TO THE FAUCET PLATE.  
DO NOT PINCH THE VALVE HARNESS BETWEEN THE VALVE BLOCK AND FAUCET PLATE.

- 1.6 Reinstall valve back block. Reinstall valve.
- 1.7 Plumb syrup supply line to Ambient Product supply tube.
- 1.8 Pressurize the system and check for leaks.
- 1.9 Reinstall Splash Plate.

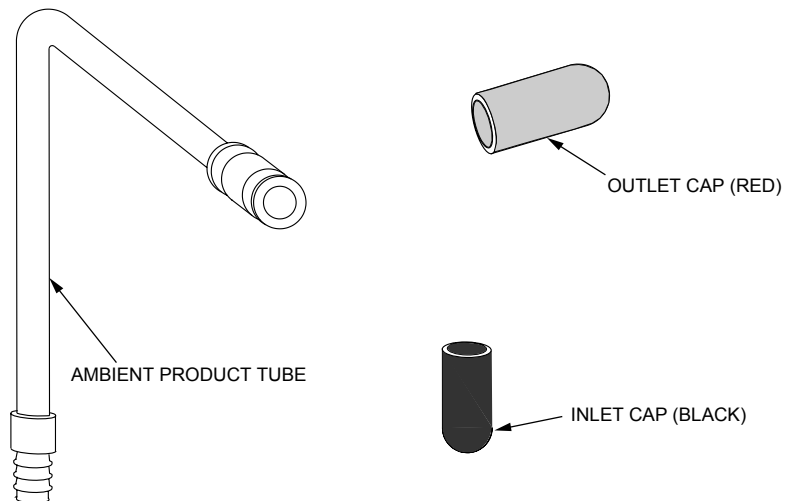


Figure 1

**LANCER**

6655 LANCER BLVD. • SAN ANTONIO, TEXAS 78219 USA • (210) 310-7000

### FAX SALES

- NORTH AMERICA – 210-310-7245 • INTERNATIONAL SALES – 210-310-7242 • CUSTOMER SERVICE – 210-310-7242 •
- LATIN AMERICA – 210-524-9567 / 210-310-7245 • EUROPE – 32-2-755-2399 • PACIFIC – 61-8-8268-1978 •

FAX ENGINEERING: • 210-310-7096

"Lancer" is the registered trademark of Lancer • Copyright — 1997 by Lancer, all rights reserved.

DATE: 06/24/97  
P.N.: 28-0358