

SLUSH FILL STATION PRESSURE SENSOR ADJUSTMENT PROCEDURE

Step 1

Unplug Fill Station from power source.


Step 2

Remove the cover from the Fill Station by removing the two (2) retaining screws. Retain screws for re-installation.



Step 3

Identify the pressure sensor.

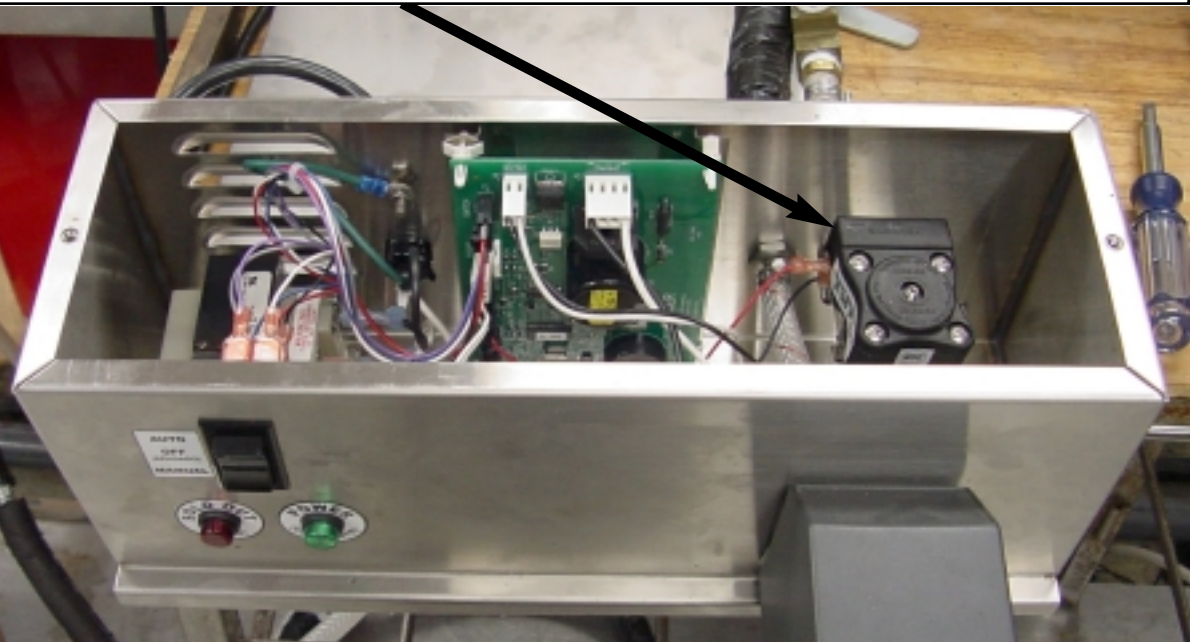


(Continued on reverse)

(Continued)


Step 4

Identify the adjustment screw on the pressure sensor. Determine if adjustment is required. Adjustment screw should be flush with the bottom of the counter-bore.

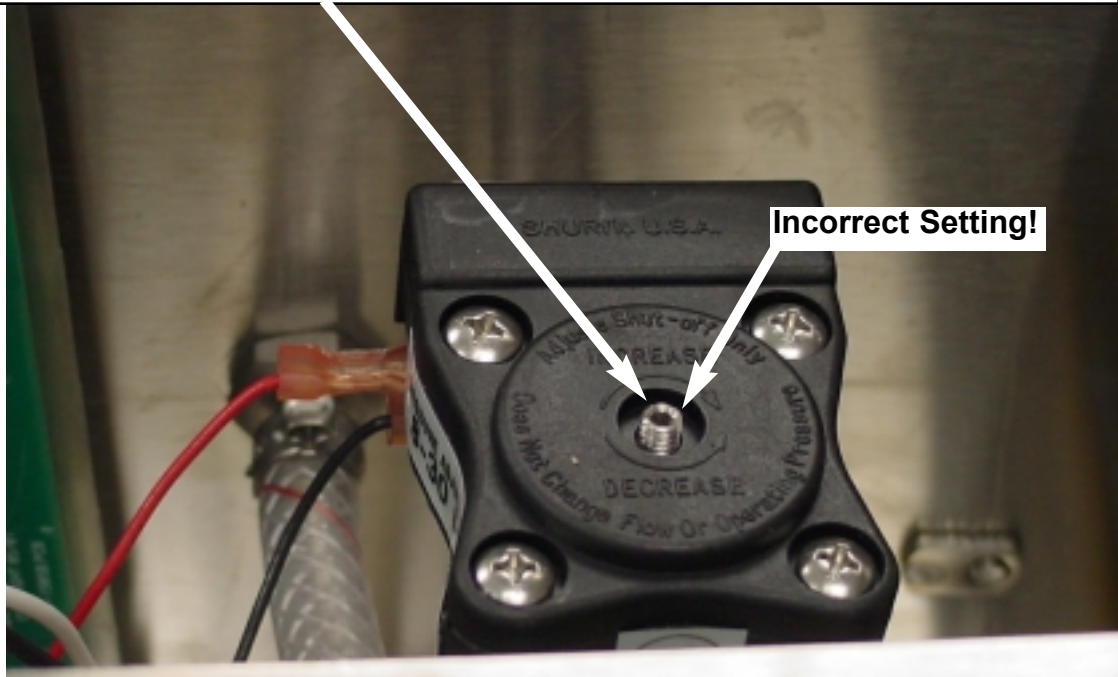

Step 5

If adjustment is required, use the Allen Wrench (provided in the kit) and turn the adjustment screw clockwise until it is "flush" with the bottom of the counter-bore.

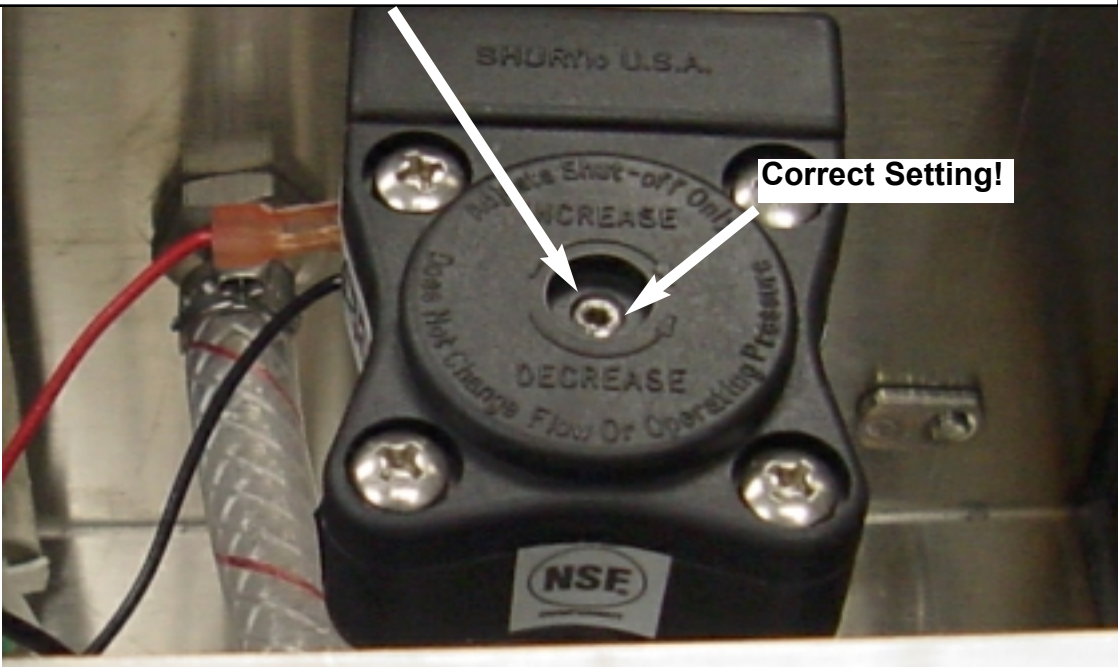

Step 6

When adjustment has been completed, place cover back on Fill Station and secure with two (2) screws removed in Step 1.

Step 7

Plug in Fill Station to power source.