



köld Chill glycol chillers are engineered for performance and value, these chillers will yield longer beer runs while protecting your product and bottom line.

Features

- Digital temperature control for maximum efficiency
- Quick mount system: save time and money, and avoid frustration with easy wall installation
- Multiple mounting positions
- Insulated reservoir and lines protects glycol temperature and minimizes condensation
- Anti-vibration pads reduce motor noise
- Air-cooled condenser
- Poly tank reservoir
- Brazed plate heat exchanger
- Rugged powder-coated steel cabinet



CUSTOMER SERVICE

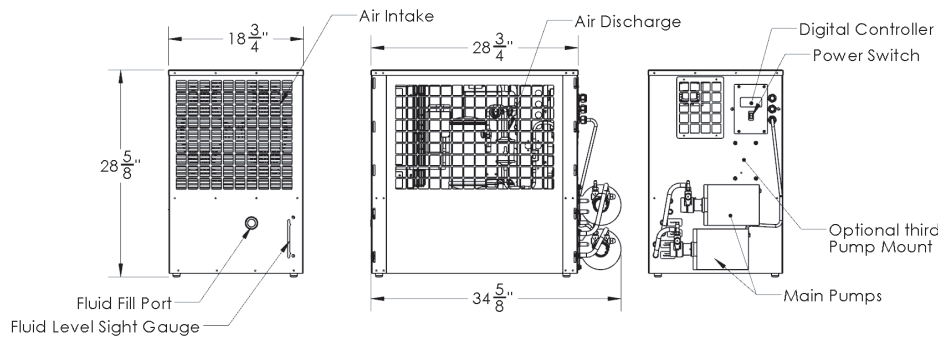
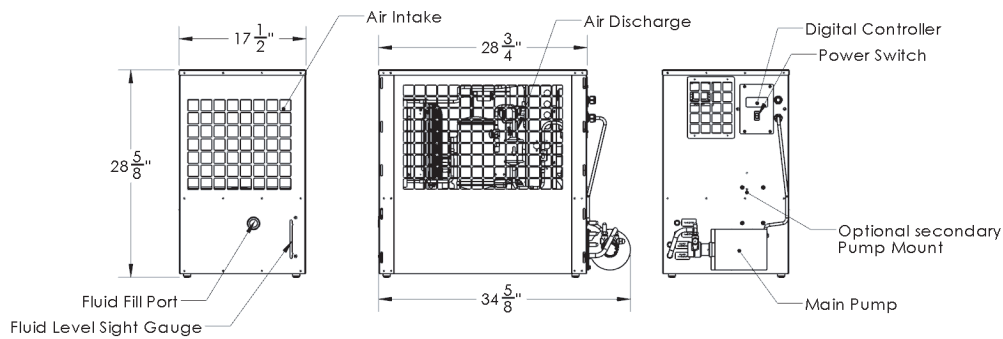
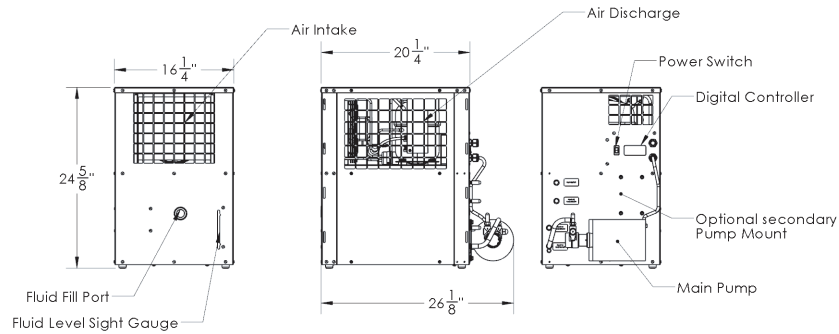
Should you require more information about our products, please do not hesitate to contact our customer service team at custserv@lancerworldwide.com.






WARRANTY

For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.

For more Information visit lancerworldwide.com or call 1-888-846-6729



Dimensions L x W x H (Including Pumps and Motors)		26-1/8" x 16-1/4" x 24-5/8"	34-5/8" x 17-1/2" x 28-5/8"	34-5/8" x 18-3/4" x 28-5/8"
Electrical	Voltage	120VAC, 60Hz, 1P	208-240VAC, 60Hz, 1P	208-240VAC, 60Hz, 1P
	RLA (Rated Load Amps)	16	16	25
	MCA (Min. Circuit Ampacity)	18.6	19.4	29.2
	MOCP (Max. over Current Protection)	28.6	32.0	47.2
	Plug Type	5-20P 	6-20P 	L6-30P 
Refrigeration Circuit	Compressor	1/2 hp	1 hp	1-1/2 hp
	Cooling Capacity	3,600 BTU/hr	7,250 BTU/hr	11,500 BTU/hr
	Refrigerant	R134a		
Fluid Circuit	Reservoir Capacity	4 Gallon		
	Glycol Pumps	Single Pump (dual pump capable)		Dual Pump (Triple pump capable)
	Fluid Connections	3/8" Barbed		
	Pump	80 GPH 1/3 HP Rotary Vane		

For more Information visit lancerworldwide.com or call 1-888-846-6729