

- Delta 9100 Remote 2500 Remote (9cir)

Delta 9100



2500 Remote



The **Delta 9100 and 2500 Remote** CED Remote Recirculation systems are a benchmark in the fountain dispensing market. Built to the quality standards that Lancer™ is known for, these units utilize cold carbonation and a stainless steel recirculating pump to provide optimum temperature product to a remote tower location

Features

- Built in Cold Carbonation
- Stainless Steel Construction exterior and interior
- CFC Free Refrigerant
- Lancer™ Electronic Ice Bank Control and Liquid Level Control

Certified by these agencies:



ETL Certified to UL STD 471 and CAN/CSA STD 22.2 No. 120

CUSTOMER SERVICE

Should you require more information about our products, please do not hesitate to contact our customer service team at custserv@lancerworldwide.com.




WARRANTY


For warranty specifics by product, contact your Lancer™ Sales Representative. Equipment design and/or specifications are subject to change without notice.

Delta 9100 / 2500 Remote Recirculation Systems

- Delta 9100 Remote 2500 Remote (9cir)

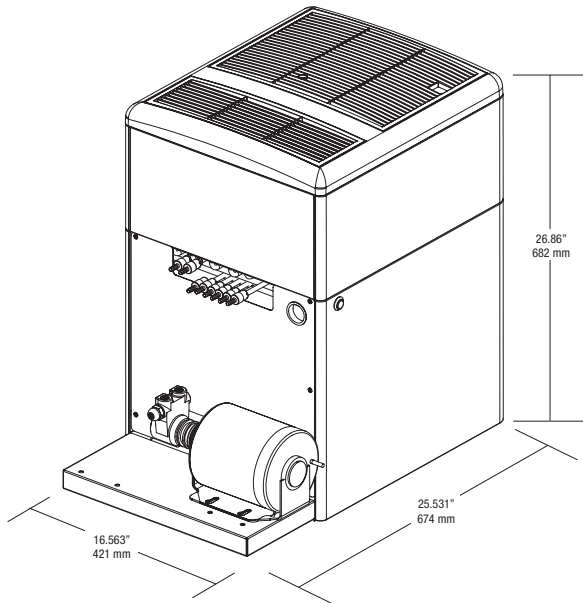

Delta 9100 - Six chilled syrup circuits and provision for chilled plain water.

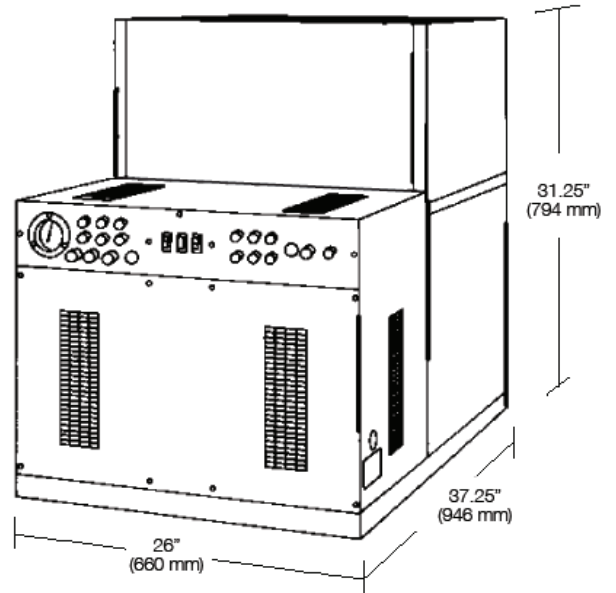

2500 Remote - 9 circuits

Dimensions

Delta 9100 - 26.86" H x 16.563" W x 25.531" D
(682 mm H x 421 mm W x 674 mm D)
2500 Remote - 31.25" H x 26" W x 37.25" D
(794 mm H x 660 mm W x 946 mm D)

Weight

Delta 9100 - With water: 220 lbs (99 kg) - Shipping: 170 lbs (77 kg)
2500 Remote - With water: 529 lbs (240 kg) - Shipping: 360 lbs (163 kg)

Electrical

Delta 9100 - 115V/60Hz - 230V/50Hz
2500 Remote - 115V/60Hz, 16 Amps - 230V/50Hz, 9 Amps

Compressor

Delta 9100 - 1/3 hp
2500 Remote - 3/4 hp

Fittings for 2500 Remote

Stainless steel 3/8" Flare
Inlet and Outlet; water, soda, syrup; 1/4" Flare, CO2 Inlet

Water Requirements for both units

Minimum flowing pressure of 25 PSIG
(1.76 kg/cm², 1.72 BAR)
Maximum static pressure of 50 PSIG
(3.52 kg/cm², 3.45 BAR)

Ice Bank Weight for Delta 9100

22-24 lbs (10kg - 11.8kg)

Carbon Dioxide (CO₂)

Delta 9100 - Minimum pressure of 70 PSIG
(4.92 kg/cm², 4.83 BAR)
Maximum pressure of 80 PSIG
(5.62 kg/cm², 5.52 BAR)

2500 Remote - Minimum pressure of 100 PSIG
Maximum pressure of 120 PSIG

WARNING

If water source exceeds 50 PSIG (3.52 KG/CM²), a recommended water regulator assembly (PN 18-0253) must be used to limit water pressure to 50 PSIG (3.52 KG/CM²). Failure to use regulator will result in improper performance of dispenser.

For more information visit lancerworldwide.com or call 1-800-729-1500