


This instruction sheet applies to:

PN 82-4160 Kit, EXSP, DB, Field 22”
PN 82-4163 Kit, EXSP, DB, Field 30”

The Drain Box Kit includes:

Quantity	Part Number	Description
1	30-10484 30-10490	Splash Plate Extended, 22” Splash Plate Extended, 30”
1	05-2795	Base, Bracket, Drain Box
2	04-0061	Philips Mounting Screws
1	05-2796	Drain Box
1	05-2825	Insulation Sleeve

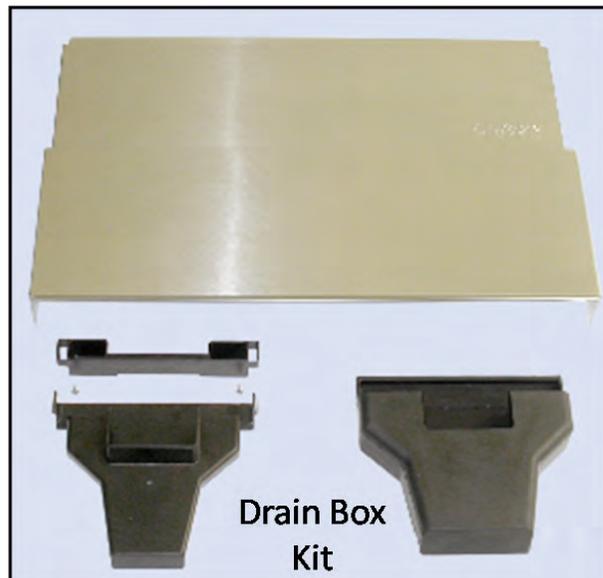

CONTINUED ON NEXT PAGE

The new Extended Splash Plate with Insulated Drain Box is a product enhancement for Lancer's ACIB platform used with a built-in counter drain trough. The improvements help ensure that all melt water from front-draining ACIB's is captured and directed to the built-in counter drain. The Insulated Drain Box also eliminates condensation from forming on the Drain Box and the exterior surface of the Extended Splash Plate. The snap on features and ease of assembly/disassembly allow for regular maintenance and cleaning.

Before beginning, disconnect electrical power.



STEP 1

Disconnect power to the dispenser.



STEP 2


Remove Extended Splash Plate and discard if a retrofit.

CONTINUED ON NEXT PAGE




STEP 3

Remove the two bottom Agitator Motor Shroud screws and discard.

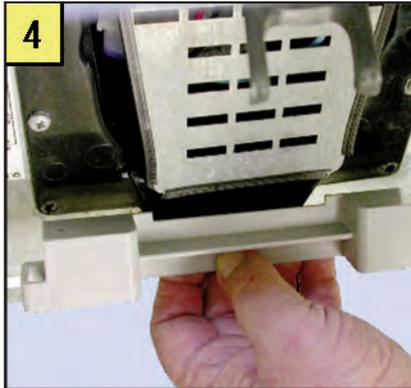

STEP 4

Align mounting holes in Base Bracket with holes in shroud.

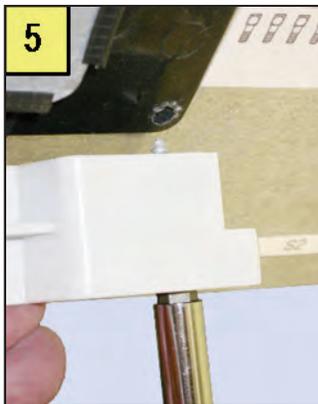

STEP 5


Insert kit mounting screw through base hole and repeat for other side.

CONTINUED ON NEXT PAGE




STEP 6

Tighten mounting screw through base bracket and repeat for other side.

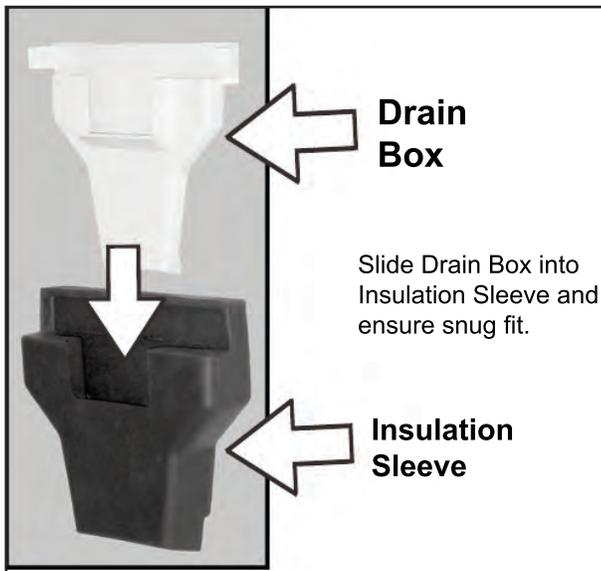


CONTINUED ON NEXT PAGE

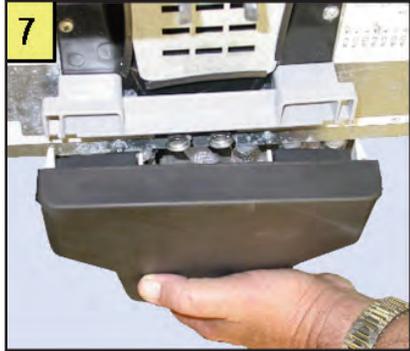


STEP 7

Align Drain Box locking tabs with slots in base.

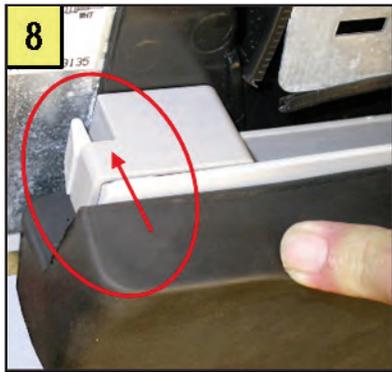

STEP 8


Push tabs into Base slots until they lock in place.

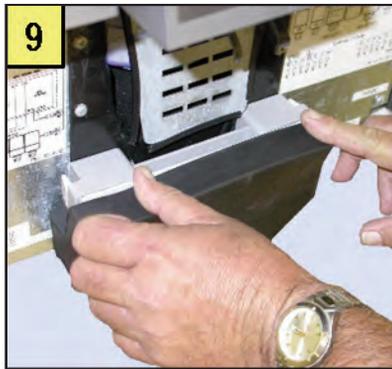

STEP 9

Double check to ensure tabs are locked in place.

CONTINUED ON NEXT PAGE

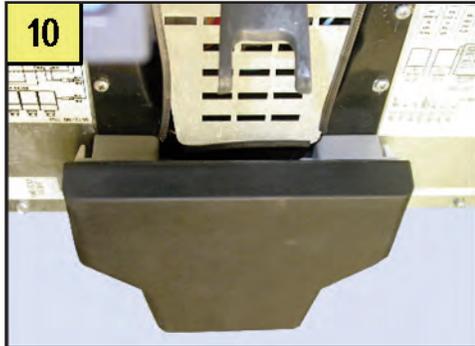

STEP 10

Ensure that Drain Box is aligned directly over counter drain.



STEP 11

Peel protective film off Extended Splash Plate.



STEP 12

Install Extended Splash Plate on unit.

Reconnect power.