

# **CED Series**

Counter Electric Dispensers – External Carbonation

☐ CED 500 ☐ CED 1500 ☐ CED 1500E ☐ CED 2500

#### **CED 1500**



Lancer's Counter Electric

**Dispensers (CED)** are designed using the highest quality materials and proven technology providing our customers with consistent drink quality.

#### **Features**

- Stainless steel construction exterior and interior
- Available with 4, 5, 6, or 8 post-mix dispensing valves that can be serviced independently
- Insulation is CFC free, 0 GWP, structural foam
- All installation from front of unit
- CFC free, R134A refrigerant
- Flex manifold configuration for multiple non carbonated drinks
- All syrup lines chilled
- LEV® valves standard, other valves available upon request
- Key lock switch
- Lancer<sup>™</sup> electronic ice bank control
- 24V secondary transformer
- Available in small, medium and large formats
- External carbonator needed

# Certified by these agencies:

**Accessories and Options** 



Leg Kit



Lighted Marquee





# Intertel

**CUSTOMER SERVICE** 

Should you require more information about our products, please do not hesitate to contact our customer service team at custserv@lancerworldwide.com.



#### WARRANTY


For warranty specifics by product, contact your Lancer™ Sales Representative. Equipment design and/or specifications are subject to change without notice.



# **CED Series**

Counter Electric Dispensers – External Carbonation

☐ CED 500 ☐ CED 1500 ☐ CED 1500E ☐ CED 2500

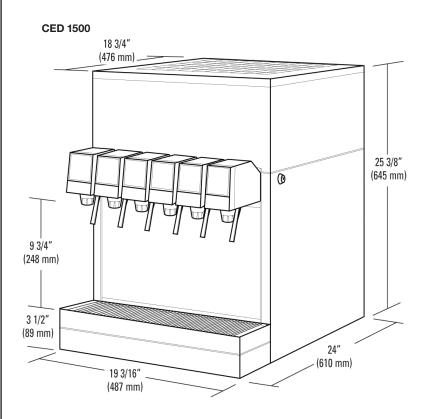

# **Distinctive Design**

All valves are post-mix dispensing and can be serviced independently

- CED 500 4 Valves Flooded 4-0 Split 2-2
- CED 1500 5 valves (2-2-1) 6 valves (3-2-1)
- CED 1500E 5 valves (2-2-1) 6 valves (3-2-1)
- CED 2500 6 valves (3-2-1) 8 valves (3-1-1-3)

#### **Dimensions**

CED 500 - 27.5" H x 10.375" W x 25.25" D (699 mm H x 264 mm W x 641 mm D) CED 1500 - 25.375" H x 19.187" W x 24" D (645 mm H x 487 mm W x 610 mm D) CED 2500 - 31.25" H x 26" W x 27.125" D (794 mm H x 660 mm W x 689 mm D)

#### Weight

CED 500 - Empty: 89 lbs (40kg) - Operating: 131 lbs (59 kg) Shipping: 108 lbs (49 kg)

CED 1500 - Empty: 130 lbs (59 kg) - Operating: 230 lbs (104 kg) Shipping: 170 lbs (77 kg)

CED 2500 - Empty: 209 lbs (95 kg) - Operating: 376 lbs (171 kg) Shipping: 257 lbs (117 kg)

## Ice Bank Weight

CED 500 - 17 lbs (7.7 kg)

CED 1500 - 30 lbs (13.6 kg)

CED 2500 - 55 lbs (25 kg)

### **Water Bath**

CED 500 - Capacity: 5 gal (19L) CED 1500 - Capacity: 12 gal (45L) CED 2500 - Capacity: 21 gal (80 L)

#### **Electrical**

CED 500 - 115V/60Hz, 7 Amps - 230V/50Hz, 3.3 Amps CED 1500 - 115V/60Hz, 7.8 Amps - 230V/50Hz, 4.5 Amps CED 2500 - 115V/60Hz, 12 Amps - 230V/50Hz, 4.3 Amps

## Compressor

CED 500 - 1/4 hp CED 1500 - 1/3 hp CED 500 - 3/4 hp

# Motors

CED 500 - Agitator: 15 w - Condenser fan: 9 w CED 1500 - Agitator: 25 w - Condenser fan: 9 w CED 2500 - Agitator: 25 w - Condenser fan: 35 w

# Fittings for all

Syrup inlets: 3/8" (9.5 mm) male barb Soda inlets: 3/8" (9.5 mm) male barb